

## COB DOWN LIGHT MAXLIT, LAURA & ELEGANT

### INDOOR LIGHT

COB LED downlight with die-cast aluminium housing in white powder coating finish, anti glare diffuser and separate energy efficient electronic driver.


#### Product features

- Aluminium Casting
- Available CCT : 3000 - 6500k
- Easy & fast Assembly
- Life Span : 50,000 Burning Hours
- LED : Bridgelux
- No UV Rays, No Mercury
- Energy Efficient

#### Driver Specifications

Input Voltage	: 110 - 240v AC	Power Factor	: >0.97
Frequency	: 50/60 Hz.	Thershold	: < 10%
Efficiency	: >93%		

#### Recommended Usage

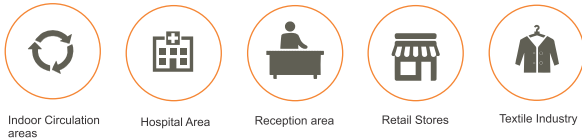

Indoor Circulation areas

Hospital Area

Reception area

Retail Stores

Textile Industry

#### Technical Details



All Dimensions are in mm

Product Description	Code	Height	Overall Dimension	Cutout DIA
5w Maxlit COB DL (lens)	C 042	30	90	60
10w Maxlit COB DL (lens)	C 043	65	85	54
15w Maxlit COB DL (lens)	C 044	90	85	54
20w Maxlit COB DL (lens)	C 045	100	110	65
30w Maxlit COB DL (lens)	C 046	125	140	65
10w Laura (Round)	C 047R	65	92	84
10w Laura (Square)	C 047S	65	92	84
18w Elegant (Round)	C 048	77	130	107

