

FITTINGS THAT BREATHE

LED STREET LIGHT SUPER ECO

OUTDOOR LIGHT

Ideal for any road or street Applications.
130 lumens per watt help to reduce pay back period of energy saving.
A Excellent light distribution and uniformity. Alumuninum Casting.


Product features

- Aluminium Casting with Toughend Glass
- Available CCT 3000 - 6500k
- Easy & fast Assembly
- Life Span of 50,000 Burning Hours
- LED : Bridgelux
- No UV Rays, No Mercury, No Infrared
- Energy Efficient

Driver Specifications

Input Voltage : 110 - 240v AC	Power Factor : >0.97
Frequency : 50/60 Hz.	Thershold : < 10%
Efficiency : >93%	

Recommended Usage

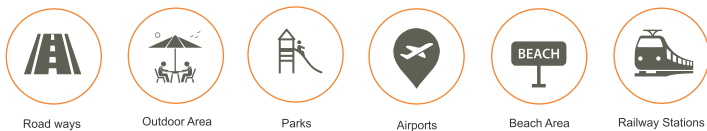

Technical Details



All Dimensions are in mm

Product Description	Code	Length	Height	Pipe DIA
24w Super Eco SL	C 069	275	95	40
36w Super Eco SL	C 070	315	135	35
48w Super Eco SL	C 071	360	135	60
60w Super Eco SL	C 072	360	230	60
75w Super Eco SL	C 073	360	230	60
100w Super Eco SL	C 074	480	285	75
120w Super Eco SL	C 075	480	285	75
150w Super Eco SL	C 076	480	285	75



Breather