

FITTINGS THAT BREATHE

LED FLOOD LIGHT REGAL

OUTDOOR LIGHT

Aesthetically designed LED Flood Light Luminare equipped with specially designed heat sink, reliable integrated energy efficient electronic driver, suitable for easy replacement of conventional flood light.

Product features

- Material : Aluminium Casting with Toughend Glass
- Available CCT : 3000 - 6500k
- Easy & fast Assembly
- Life Span : 50,000 Burning Hours
- LED : Bridge lux
- No UV Rays, No Mercury
- Energy Efficient


Driver Specifications

Input Voltage	: 110 - 240v AC	Power Factor	: >0.97
Frequency	: 50/60 Hz.	Thershold	: < 10%
Efficiency	: >93%		

Recommended Usage



Technical Details

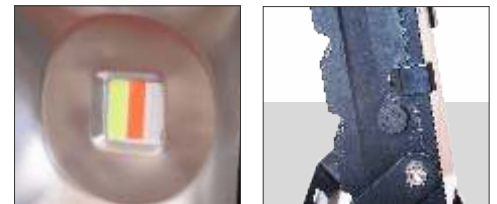

Auto change RGB

Breather

Product Description	Code	Length	Height	Width
20w Regal Flood Light	C 077	170	90	130
30w Regal Flood Light	C 078	200	90	180
30w Regal Flood Light (RGB)	C 079	200	90	180
60w Regal Flood Light	C 080	240	90	200
100w Regal Flood Light	C 081	280	120	260
150w Regal Flood Light	C 082	350	160	315
200w Regal Flood Light	C 083	350	160	315