

## SUPERLITE SURFACE PANEL LIGHT & TRI-COLOR

### INDOOR LIGHT

Decorative surface/wall mounted square downlight fixture with Acrylic diffuser to give glare free light.


#### Product features

- Aluminium Casting with Acrylic
- Available CCT : 3000 - 6500k
- Easy & fast Assembly
- Life Span : 50,000 Burning Hours
- LED : Bridgelux
- No UV Rays, No Mercury
- Energy Efficient

#### Driver Specifications

Input Voltage	: 110 - 240v AC	Power Factor	: >0.97
Frequency	: 50/60 Hz.	Thershold	: < 10%
Efficiency	: >93%		

#### Recommended Usage

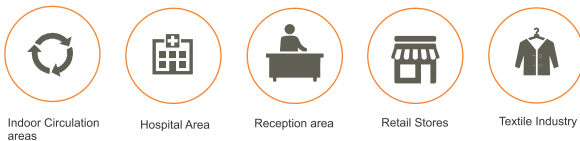

#### Technical Details



All Dimensions are in mm

Product Description	Code	Height	Overall Dimension
9w SRPL/SSPL	C 012R/S	-	115/115x115
12w SRPL/SSPL	C 013R/S	-	165/165x165
15w SRPL/SSPL	C 014R/S	-	165/165x165
18w SRPL/SSPL	C 015R/S	-	223/223x223
22w SRPL/SSPL	C 016R/S	-	223/223x223
15w <b>TRI - COLOR</b> SRPL/SSPL	C 021R/S	-	165/165x165